
S2342

Smartphone & Tripod Adapter


User Manual

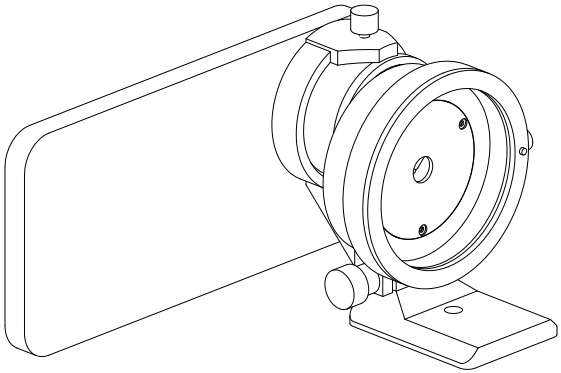

SWEBO

Get to know S2342

Connect a phone and support the lens-converter assembly.

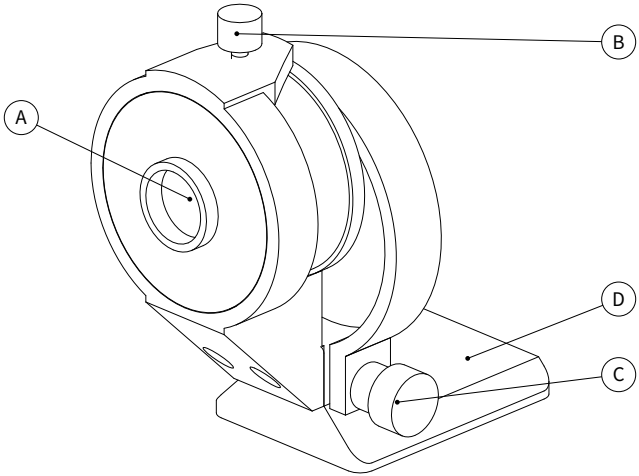

A Phone sleeve
Fits a threaded phone case

B Sleeve lock
Secures the adjustment

C Support-clamp knob
Secures the optical assembly

D Arca-type plate
Connects to the tripod

Choose converter & case

Match the converter, phone model and mounting thread.

M17 × 0.75

Phone-case mounting thread

Compatible 10 mm converters


S1747, S1754, S1755, S1756 and S1994.

Prepare the phone case

Use a case for your phone with an M17 × 0.75 accessory-lens mounting thread.

Connect and support

Secure the support clamp before attaching the phone.

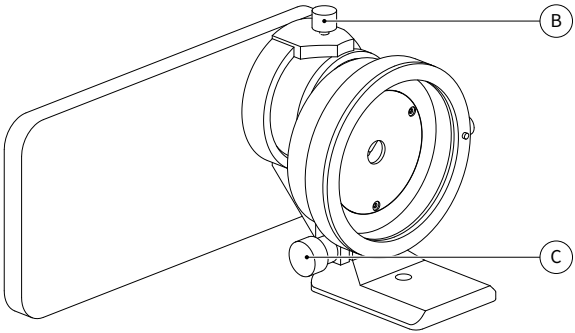

B Sleeve locking knob

C Support clamp knob

01 Secure the converter

Fit the converter in the support clamp and tighten C; mount the base.


02 Attach the phone

Fit the matching threaded phone case. Support the phone and check B.

03

Set distance and orientation

Support the phone and retighten after each adjustment.

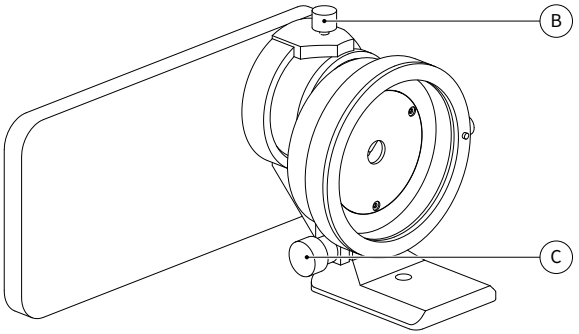

B Sleeve locking knob

C Support clamp knob

01 Refine the spacing


Release the relevant clamp, adjust phone-to-eyepiece spacing and lock.

02 Set the orientation

Support the phone, release sleeve lock B, rotate into position and retighten.

Use a lens tripod collar

Support the assembly at the lens collar.

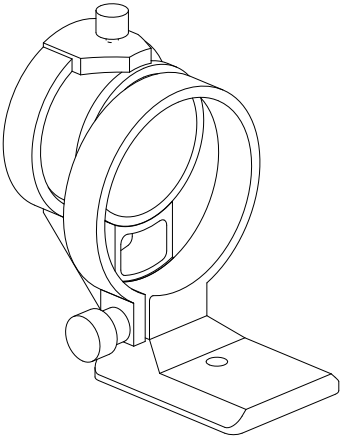

01 Secure the lens support


Mount the lens collar firmly and support the lens, converter and phone.

02 Remove the base plate

Use the supplied hex key to remove the bottom plate. Store its screws with it.

Return to visual viewing

Remove the phone connection while keeping firm support.

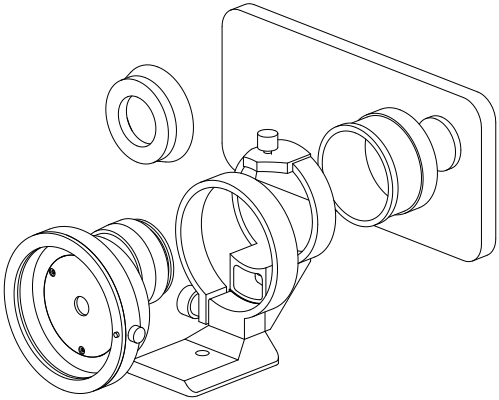

01 Detach the phone
Support the phone as you release its connection.

02 Remove the phone sleeve
Detach the rear phone sleeve to restore direct viewing.

03 Store the parts
Protect the sleeve threads, clamping faces and removed parts.

Shanghai Shebao Optoelectronic Technology Co., Ltd.
No. 388 Muhua North Road, Fengxian District
Shanghai, China
www.swebo.us
swebochina@gmail.com